


# Wibblue

Detect more

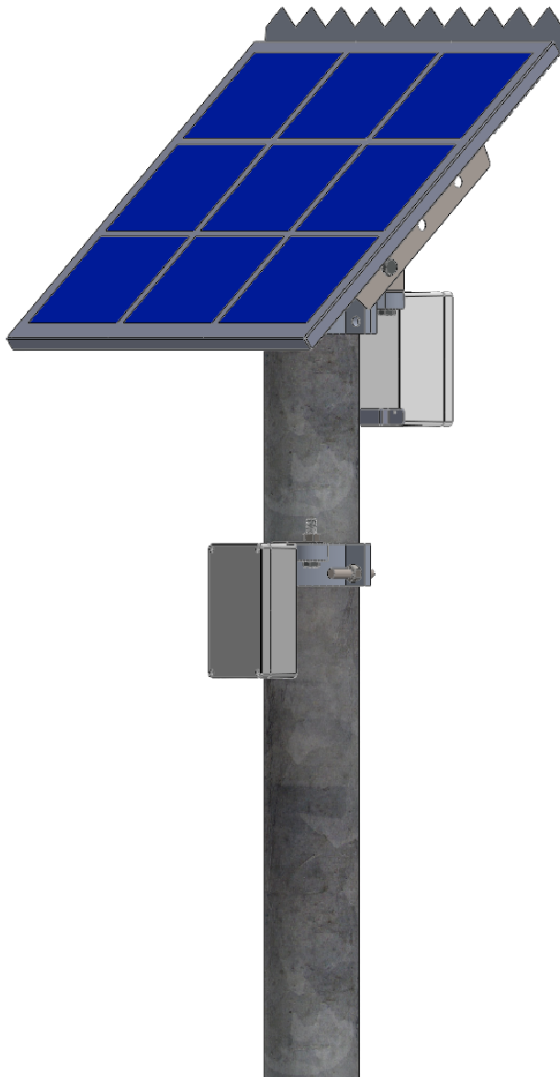

**Standalone solar + battery  
Bluetooth, BLE, WiFi, and LAP  
MAC capture module**

[www.wibblue.com](http://www.wibblue.com)

WiFi, Bluetooth classic, BLE and hidden BT LAP scanning

100-120mm pole mounts

4G LTE Cat1

Anti bird nesting bracket

Roads Connect management

Managed long life LiFePo4 battery

Addinsight compliant

Removable smart card for config

- 10°C to 65°C

## Wiblue OP Scanner Specifications

Voltage	9-18V DC
Power	5W
Dimensions	140 x 90 x 160 mm
Mounting	100-120mm pole mount options Can use standard Australian traffic pole Fast swap Battery and Wiblue with M12 bolts
Temperature	-10°C to +65°C
Interfaces	3 x Bluetooth, BLE , WiFi 1 x BT LAP (ubertooth type) detector (RP-SMA) 1 x Smart Card 1 x Micro SIM 4G card 1 x USB Console
Management	Local USB, remote GUI and roads connect UI

## Wiblue OP Battery Specifications

Voltage	Solar panel input up to 24V DC
Power	115Whr
Dimensions	180 x 160W x 90 mm
Mounting	100-120mm pole mount options
Temperature	-10°C to +65°C
Management	Fully managed battery with energy logging and alerting

## Solar panel Specifications

Voltage	12V nominal
Power	40W
Mounting	100-120mm pole mount options

Sales and service  
[www.wiblue.com](http://www.wiblue.com)

